


**OPTIMA MOULD OP 205-25/CBMM -L FSC****G9F08268FC****PRODUCT CERTIFIED FSC MIX CREDIT - CODE COC NOVACART DNV-COC-000572**

Technical data	
<b>Product family:</b>	Optima Baking Moulds
<b>Base A:</b>	199 mm. +/- 1 mm.
<b>Top in B:</b>	206 mm. +/- 2 mm.
<b>Top in C:</b>	212 mm. +/- 2 mm.
<b>Top out D:</b>	219 mm. +/- 2 mm.
<b>Depth H:</b>	25 mm. +/- 1 mm.
<b>Height HI:</b>	27 mm. +/- 1 mm.
<b>Weight:</b>	13,1 gr. +/- 5%
<b>Capacity in liter*:</b> <i>indicative datum</i>	0,8
<b>Material:</b>	Triple layer cardboard, uncoated, made of bleached pure cellulose, inner side laminated with polyester film of 7 my, through monocomponent adhesive. FSC certified cardboard.
<b>Printing:</b>	Full surface printing (both sides)
<b>Ink:</b>	Brown similar to pms 476C, resistant to heat (200°C). Our inks and promoter are in conformity with the requirements stated by EUPIA guidelines on printing inks applied to the non-food contact surface of food packaging materials and articles.
<b>Additive:</b>	Water based varnish resistant to heat and humidity.
<b>Tot. Gr/sqm:</b>	217 gr. +/- 5%
<b>Heat resistance:</b>	180° > 200°C
<b>Acceptability criteria:</b>	Percentage of defects within 5x1000
Packaging data	
<b>Box</b>	reinforced boxes, mm. 670*380*460
<b>Volume</b>	m3 0,117
<b>Quantity per box</b>	600 pcs. (100 pcs.*6 rows)
<b>Pallet</b>	EUR-PAL 80 * 120
<b>Lay-out</b>	4 boxes per 5 levels: tot. 20
<b>Quantity per pallet</b>	12.000 pcs.
<b>Protective film</b>	Low density polyethylene used for packaging
<b>Box label</b>	Indications of item code and description, quantity, production number, production date, operator.
<b>Batch number</b>	Corresponds to a sequential numbering of the machine production and is indicated on each box.
<b>Traceability</b>	Is guaranteed for all raw materials and finished products, through labels on carton box and internal system, according to Reg. CE 1935/2004
<b>Storage</b>	Sizes are guaranteed if the product is properly stored in the original packaging, not tampered and at the following conditions: humidity not exceeding 70% - suggested temperature from 16° to 25°C.

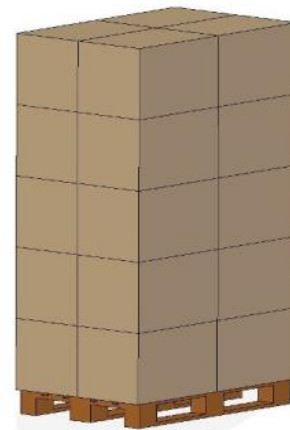


<b>Regulatory compliance:</b>	<p><b>CE 1935/2004:</b> Regulation concerning material and articles intended to come into contact with food, migration, labelling and traceability.</p> <p><b>10/2011/UE:</b> Regulation concerning plastic materials and articles intended to come into contact with food.</p> <p><b>CE 2023/2006:</b> Regulation concerning the good manufacturing practice for materials and articles intended to come into contact with food.</p> <p><b>DM 21/03/1973</b> and following updating and amendments: Hygiene control of packaging and articles intended to come into contact with food</p> <p><b>DPR 777/82:</b> and following updating and amendments.</p>
<b>Quality System:</b>	Novacart is in conformity with the requirements of Standards: <b>BRC PACKAGING</b> and <b>UNI EN ISO 14001:2015</b>

Prepared	Approved	Date	Rev.	Modifications executed:
E. Sartor		18/01/2022	0	
QUALITY ASSURANCE				
E. Sartor				

PLEASE SEE OVERLEAF FOR TECHNICAL DRAWING

**OPTIMA MOULD OP 205-25/CBMM -L FSC**

**G9F08268FC**

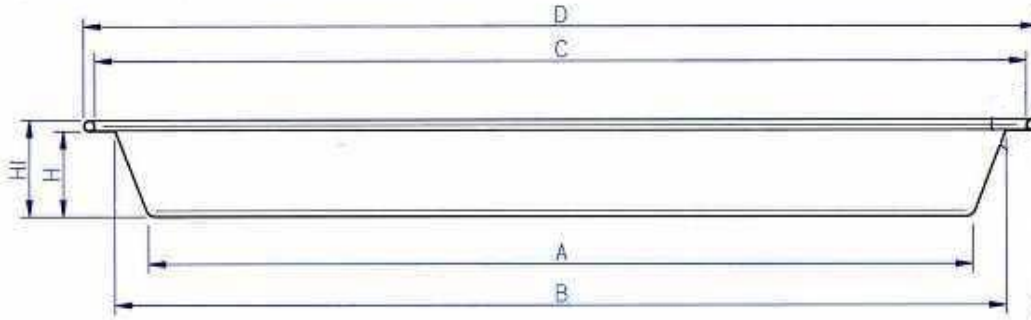

Prepared	Approved	Date	Modifications executed:
<i>E.Sartor</i>	<i>AS</i>	18/01/2022	
QUALITY ASSURANCE E.Sartor			

**Customer's approval**

Stamp and signature:

Date: